

 **First in Quality. Built to Last.**



# TB-2

## TOP AND BOTTOM CASE TAPER

### MEET YOUR CASE TAPING NEEDS

The operator friendly TB-2 top and bottom belt case taper is designed for large run case sealing. The top and bottom drives are ideal for tall and narrow uniform cases and heavier cases up to 85 lbs. No air is required to run the TB-2 case taping system so it can be placed anywhere in the plant.

### MAXIMUM STABILITY

Four drive belts work in unison to move your cases consistently through for a strong and consistent seal. TB-2 utilizes a dual mast with twin lead screws for greater tape head stability and adjustable side guides to center each case. The unit also features top compression rollers to stabilize the case and push the top flaps together, making it a great solution for over-filled cases. The system is designed to keep maintenance to a minimum and provide a fast and efficient alternative to hand taping.

### FLEXIBILITY FOR YOUR OPERATION

TB-2 offers fast and easy case changes and flexibility for boxes 5" in length and greater. Adjustments can be made on the fly with easy hand tighten knobs and cranks. TB-2 utilizes Easy-Taper Quick-Load top and bottom tape cartridges and will seal boxes as narrow as 6.0" wide and as low as 4.5" tall.

## FOR TALL AND NARROW CASES

TB-2 utilizes top and bottom drives and a dual mast for greater tape head stability. It is ideal for tall and narrow or over-filled cases.

### INCREASE YOUR ROI

Top and bottom tape heads lift out for easy threading and accept 2" wide pressure-sensitive tape as a standard, or can be ordered with 3" tape heads. The use of Easteey's TB-2 case taping machine can be learned in minutes, avoiding breaks in production and downtime, saving your company money and increasing your ROI.

### RUGGED WORKHORSE



CE approved dual drive motors and aggressive industrial strength top and bottom drive belts make TB-2 a workhorse that will stand up to your toughest challenges. Each case taping machine is made from 12 gauge steel that withstands even the most rugged applications. A powder coated exterior protects the machine from abusive conditions and guarantees years of use.

### THE RIGHT SOLUTION



Rugged design. Proven reliability. Simple operation. Your benefits go on and on. When it comes to industrial operation, rely on Easteey to provide the right solution for your case sealing needs.

  
**EASTEY®**  
First in Quality. Built to Last.

# TB-2 TOP AND BOTTOM CASE TAPER



1. Top and bottom drive for unstable or heavy cases
2. Industrial strength pack table to allow for case movement
3. Adjustable side rails and tape head offer fast and easy case changes
4. Top and bottom tapeheads are identical and can be removed instantly without tools. Choose from two options.

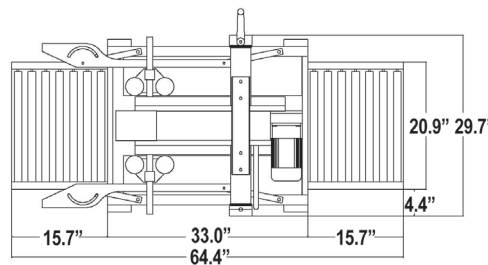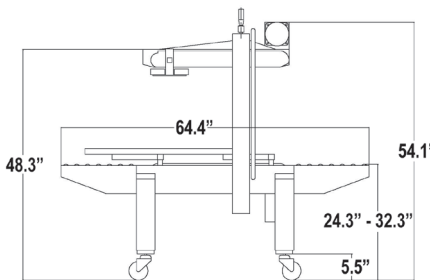

TB-2 FEATURES		TB-2 TAPING SPECIFICATIONS				
<ul style="list-style-type: none"> <li>• Utilizes Eastey's Easy-Taper tapehead</li> <li>• Dual mast for tape head stability</li> <li>• Top compression rollers</li> <li>• Front and rear roller pack tables</li> <li>• Plug-in and go operation</li> <li>• Powder coated 12 gauge steel</li> <li>• Adjustable side guides</li> <li>• Industrial strength top and bottom belts</li> <li>• Adjustable leg extensions</li> <li>• Fast and easy box size changes</li> <li>• Low maintenance</li> <li>• Casters for transportation within plant</li> </ul>	Sealer Type	Uniform top and bottom belt, top and bottom case sealer				
	Machinery Makeup	Industrial strength 12 gauge steel, powder coated for durability				
	Belt Speed	75 feet/minute				
	Tape Speed	30 cases/minute, depending on box size and operator efficiency				
	Conveyor Height Adj.	24.3" to 32.3"				
	BOX SPECIFICATIONS		Length	Width	Depth	
	Minimum Box Size	5"	6"	4.5"		
	Maximum Box Size	Infinite	19.5"	19.5"		
	Tape Size	2" wide pressure sensitive tape, up to 15" diameter rolls, optional 3" wide tape				
	Tape Cartridge	Proven design requires no lubrication, designed for simple tape threading, removable for maintenance and interchangeable with top or bottom cartridges				
Air Requirements	None					
Electrical Requirements	110 VAC, 60Hz, 4.0A					
Agency Approvals	CE Certification					
TB-2 OPTIONAL ACCESSORIES						
3" Tape Head		Accepts 3" wide tape rolls				



7041 Boone Avenue North, Brooklyn Park, MN 55428  
 (763) 428-4846 1 (800) 835-9344  
 www.eastey.com info@eastey.com

